

**smoke
and particulates
monitoring**



LAND
instruments international

Combustion & Environmental Monitoring

model 4200

smoke and particulates monitor



Key Features and Benefits

- **Small, lightweight and compact** - *easy to locate and install*
- **High reliability, low maintenance** - *no moving parts*
- **Measurement Output in Opacity or mg/m^3** - *flexible configuration*
- **Wide range of optional accessories** - *configure to meet process needs*
- **Simple keypad operation** - *straightforward setup, calibration and diagnostics*

*Stability and reliability for continuous monitoring.
Proven economical technology for performance optimisation*

Leading Technology

The patented dual LED technology of the Model 4200 has proven itself worldwide as stable, reliable and trouble free. The lightweight and compact design makes it ideal for a wide range of applications. Simple installation, low maintenance and ease of operation ensure immediate results - vital where performance, cost and compliance benefits are of high priority.

Opacity monitoring on a municipal waste incinerator



Dust monitoring on a roadstone coating plant



Flexibility

Particulate measurements are displayed in % opacity or mg/m^3 . Easy access is provided to all instrument functions, through a removable cover on the Transceiver. All Setup, Calibration, Diagnostics and Alarms settings can be adjusted - to ensure optimum instrument performance.


Applications

- Particulate Removal System Efficiency Monitoring
- Combustion Efficiency Monitoring
- Evaluation of Control Processes
- Precipitator Power Optimisation
- Baghouse Performance Monitoring

the Model 4200 is the ideal particulate monitoring tool for multi-process plants with common stacks

Industries

- Power Utilities
- Refineries
- Chemical/Petrochemical
- Incinerators
- Cement Plants
- Roadstone Plants
- Process Industries
- Quarries
- Road Tunnels (visibility)

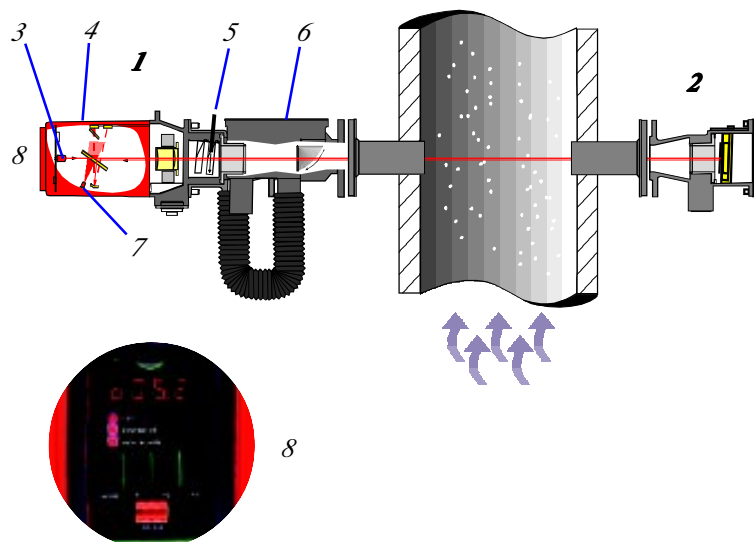

Key to Schematic

- 1 Transceiver
- 2 Retro-reflector
- 3 High Brightness Red LED
- 4 No moving parts
- 5 Built-in Audit Jig, and Check Reflector
- 6 Optional air-servo operated Fail-safe Shutter
- 7 *Patented 'flood LED' technology
- 8 Integral Control Panel

**The Model 4200 uses the Land patented Flood LED Technique
UK Patent No. 2287785
U.S. Patent No. 5,617,212*

Measurement Principle

The cross-stack, double-pass measuring system comprises a transceiver and retro-reflector unit. The transceiver has a high intensity source LED, which sends a beam of light through a diffuser and onto a beamsplitter. Half of the light is transmitted via a lens to the retro-reflector unit. The light returned is focused on to a measurement detector.

The remaining light reflected by the beam splitter is focused onto a reference detector. The opacity value is calculated from the ratio of the two detected signals.

The instrument alternates between the measurement and flood LEDs every second to eliminate drift and maintain accuracy.



Dust monitoring on a coal-fired boiler



Dust monitoring on a cement plant

Data Acquisition and Reporting Software

A fully automated Data Acquisition and Reporting system is available to log, display and output measurement data at pre-determined intervals. The PC-based software system is both simple to use and highly flexible, using the power and simplicity of Windows™.

Configuration and operation are fully menu-controlled and most routine functions can be fully automated. Data capture can be made from multiple instruments.



Dust readings from each instrument are logged at user-definable intervals, and can be combined with volume flow readings to generate total emitted mass if required. Alarm levels are configurable separately for each channel to give the operator an immediate indication of excessive emissions.

Optional Accessories

- Data Acquisition and Reporting Software
- Air-Blower/Mover Systems
- Automatic Fail Safe Shutter
- Certified Neutral Density Filters for Calibration
- Flange Mounted Optical Alignment Tool
- Weatherproof Covers

Further Information

U.K.

Land Instruments International
Dronfield, Derbyshire
S18 1DJ
Telephone: +44 (0) 1246 417691
Facsimile: +44 (0) 1246 290274
E-Mail: combustion.info@landinst.com

U.S.A.

Land Instruments International
10 Friends Lane
Newtown, PA 18940-1804
Telephone: +1 215 504 8000
Toll Free: (in USA) 800 523 8989
Facsimile: +1 215 504 0879
E-Mail: combsales@landinstruments.net
Web: www.landinstruments.net

Italy

Land Instruments Srl
Via dell'Industria, 2
20037 Paderno Dugnano, Milano
Telephone: +39 02 91 08 0020
Facsimile: +39 02 99 04 0418
E-Mail: info@landinst.it
Web: www.landinst.it

France

Land Instruments Sarl
7 Parc des Fontenelles
78870 Bailly
Telephone: +33 (0)1 30 80 89 20
Facsimile: +33 (0)1 30 80 89 21
E-Mail: combustion@landinst.fr

Poland

Land Instruments Sp z o.o.
ul. Michałowskiego 5/2
31-126 Kraków
Telephone: +48 (0) 12 632 82 62
Facsimile: +48 (0) 12 632 24 74
E-Mail: land@land.com.pl
Web: www.land.com.pl

Mexico

Land Instruments International
Av. Horacio 1132 Planta Baja "B"
Col. Polanco, D.F. 11550
Telephone: +52 (0) 55 5281 1165
Facsimile: +52 (0) 55 5281 5364
E-Mail: ventas@landinstruments.net

Specifications

Measuring System

Technique:	Double pass / path transmissometry
Operating Wavelength:	623 ± 20 nm
Light source:	High intensity red LED
Ranges:	Opacity: 0 - 20 % to 0 - 100% Dust Density: 0 - 100 to 0 to 999 mg/m ³ < 2 % of range*
Linearity:	< 2 % of range*
Resolution:	0.1 % Opacity; 0.1 mg/m ³ Dust Density
Drift:	< 3 % of range per month
Angle of Projection:	< 5°
Angle of View:	< 5°
Response Time:	5 seconds to 90 % of final value
Averaging:	Selectable from 1 s to 59 s, 1 min to 59 min, or 1 hr to 8 hrs
Suitable for Stacks:	0.3 to 9.7 m diameter / 1 to 32 ft
Flange-to-flange Pathlength:	0.6 to 10 m / 2 to 33 ft
Calibration:	Manual zero & upscale check
Method:	Built-in audit jig
Dust:	Single calibration constant

* Performance reduced for pathlengths > 7.5 m / 25 ft

Control Panel

Display:	4-digit; red LED
Keypad:	4 keys for data input; easy access via removable cover panel
Status indicators:	System OK, Alarm, DC Power

Environmental

Operating Temperature:	-20 to +55 °C / -4 to +131 °F
Max. Flue Gas Temperature:	600 °C / 1112 °F higher temperature available
Max. Flange Temperature:	200 °C / 400 °F
Environmental Rating:	IP65 / NEMA4

Compliance

Safety:	Conforms to EN 61010
EMC:	Conforms to EN 50 081 and EN 50 082

Outputs

Analogue output:	0, 2 or 4-20 mA current loop, fully isolated
Relay outputs:	System OK, High Alarm
Contact Type/Rating:	Isolated changeover contacts rated at 1A@24V d.c., 0.5 A@125 V a.c.

Electrical

Power Supply:	90 - 260 V a.c., 50/60Hz, (universal input) (additional for typical purge blower 110 V or 230 V, 50 or 60 Hz, 500 W)
Power Rating:	5 W

Air Requirements

Instrument air:	(only for air mover option) 5 - 8 bar / 75 - 120 psi ; 170 NI/min / 36 cfm
-----------------	---

Mechanical Data

Dimensions (H x W x D)	
Transceiver :	157 x 127 x 404 mm / 6 x 5 x 16 in
Retro-reflector:	127 x 127 x 200 mm / 5 x 5 x 8 in
Weight	
Transceiver:	5 kg / 11 lb
Retro-reflector:	2 kg / 4.4 lb

Options

Air Blower/Air Mover	A range of purge air supply options is available
Fail Safe Shutter	Protects the instrument if the purge air supply fails
Weather Covers:	Additional protection for severe environments
Data Logger System:	Software program for logging and correction of data
Alignment Tool:	Flange mounted light source and target for use during installation
Calibration Filters:	Certified neutral density filters for instrument linearity check

Continuous Product Development may make it necessary to change these details without notice

Copyright © 2000 - 2004 Land Instruments International

LAND
instruments international

www.landinst.com/comb/

Land Instruments International has a comprehensive range of Combustion and Environmental Monitoring Instrumentation.



Approval applies to products designed and manufactured in the UK

PDS182/06/04